


Spring-Die Mould Part Industry Company Limited

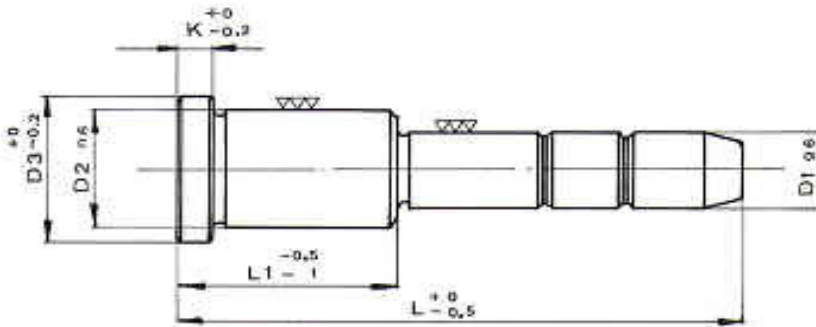

GUIDE PILLAR WITH TWO STEP Material Suj2, 1.2067, 16NiCr4 Hardness: HRC55-60

| Diameter | Shoulder | Head | Thicknee of head | Shoulder | Total length (L) | | | | | |
|----------|----------|-------------|------------------|----------|--------------------|----|----|----|----|-----|
| | | | | | 50 | 60 | 70 | 80 | 90 | 100 |
| D1(g6) | D2(n6) | D3 (0/-0,2) | K (0 /-0,2) | L1 | | | | | | |
| 12 | 18 | 22 | 5 | 22 | | | | | | |
| | | | | 26 | | | | | | |
| | | | | 36 | | | | | | |
| | | | | 46 | | | | | | |
| | | | | 56 | | | | | | |
| 14 | 20 | 24 | | 22 | | | | | | |
| | | | | 26 | | | | | | |
| | | | | 36 | | | | | | |
| | | | | 46 | | | | | | |
| | | | | 56 | | | | | | |
| 16 | 20 | 26 | | 22 | | | | | | |
| | | | | 26 | | | | | | |
| | | | | 36 | | | | | | |
| | | | | 46 | | | | | | |
| | | | | 56 | | | | | | |
| 18 | 22 | 30 | 66 | | | | | | | |
| | | | 76 | | | | | | | |
| | | | 26 | | | | | | | |
| | | | 36 | | | | | | | |
| | | | 46 | | | | | | | |
| 20 | 26 | 34 | 56 | | | | | | | |
| | | | 66 | | | | | | | |
| | | | 76 | | | | | | | |
| | | | 86 | | | | | | | |
| | | | 96 | | | | | | | |