



Spring-Die Mould Part Industry Company Limited

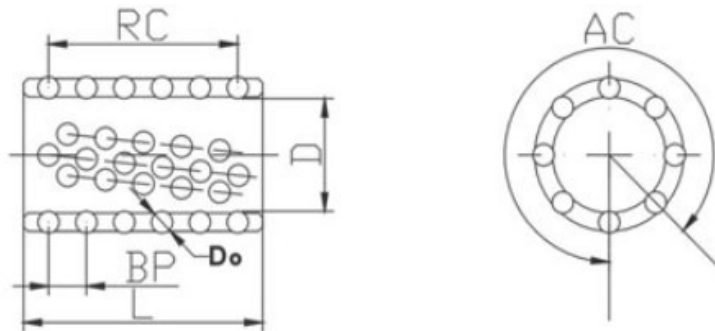

Ultra Compact Ball cage 特密型钢珠套

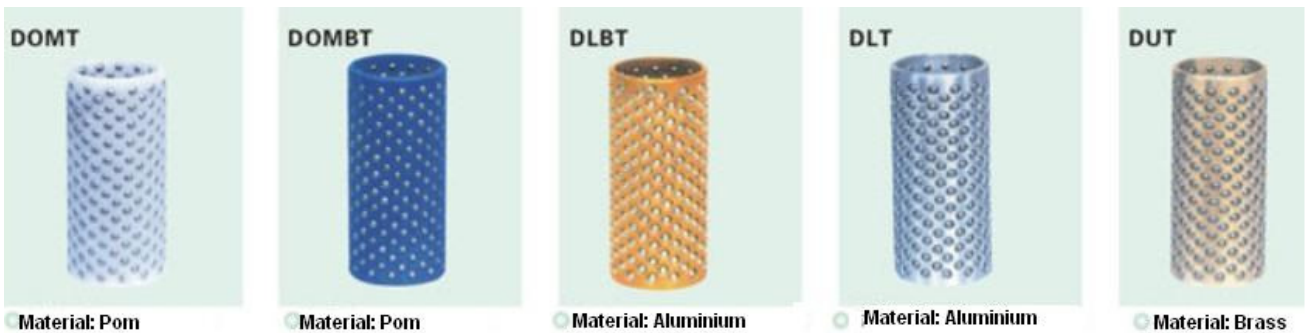

Common steel ball specification									
φ 1.0	φ 1.5	φ 2	φ 3	φ 3.176	φ 4	φ 4.76	φ 5	φ 6	φ 6.35

Specification D*L	Guide post diameter	Length	Hole number (AC)	Row Number (RC)	Steel Ball Diameter (Do)	Steel Ball Number (Balls)	Stell Ball Distance (BP)
10*25	10	25	10	9	2	90	2
10*30		30	10	12	2	120	
10*35		35	10	14	2	140	
13*25	13	25	10	9	2	90	2
13*30		30	10	12	2	120	
13*35		35	10	14	2	140	
16*30	16	30	12	12	2	144	2
16*35		35	12	14	2	168	
16*40		40	12	16	2	192	
16*30	16	30	14	7	3	98	3.5
16*35		35	14	8	3	112	
16*40		40	14	9	3	126	
19*50	19	50	14	12	3	168	3.5
19*60		60	14	14	3	196	
20*50	20	50	14	12	3	168	3.5
20*60		60	14	14	3	196	
22*50	22	50	14	12	3	168	3.5
22*60		60	14	14	3	196	

Specification D*L	Guide post diameter	Length	Hole number (AC)	Row Number (RC)	Steel Ball Diameter(Do)	Steel Ball Number (Balls)	Stell Ball Distance(BP)
25*60	25	60	18	13	3	234	4
25*75		75	18	16	3	288	
28*60	28	60	18	13	3	234	4
28*75		75	18	16	3	288	
28*60	28	60	18	11	4	198	4.5
28*75		75	18	14	4	252	
31*75		75	20	15	4	300	
31*90	31	90	20	18	4	360	4.5
32*75	32	75	20	15	4	300	4.5
32*90		90	20	18	4	360	
38*75	38	75	22	12	5	264	5
38*90		90	22	15	5	330	
45*90	45	90	22	15	5	330	5
45*110		110	22	19	5	418	
50*90	50	90	24	15	5	360	5
50*110		110	24	19	5	456	

Homepage:<http://www.spring-diemouldpart.com> Email:export@spring-diemouldpart.com